


Solar Photovoltaic Modules

USP45 / USP50 / USP55

UPL Solar modules provides cost-effective photovoltaic power for general use, operating DC directly or, in an inverter-equipped system, AC loads. The 36 cells in series provides 45W, 50W & 55 Watts of maximum power, it is used primarily in utility grid-supplemental systems, telecommunications, remote villages and clinics, pumping and load-based aids to navigation.

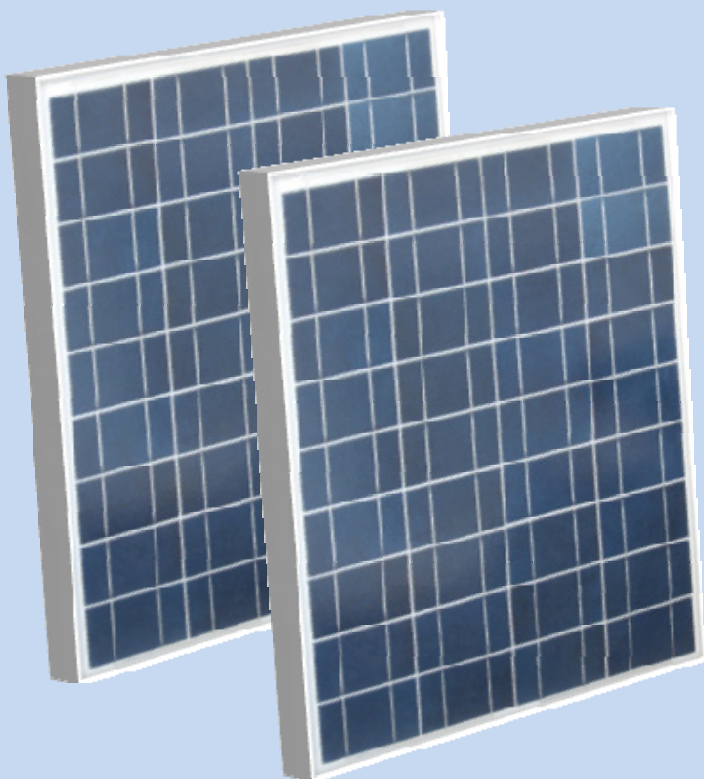

P6

S

E


R

I

E

S

*Polycrystalline
Modules*

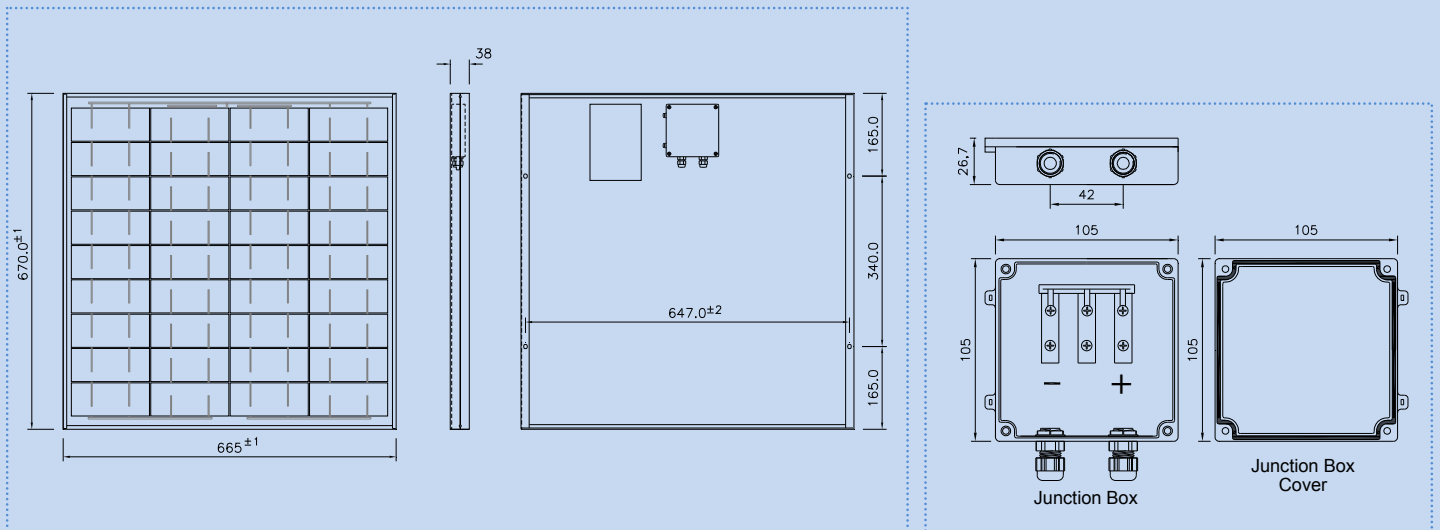

Electrical and Mechanical Data

Model	USP45	USP50	USP55
Maximum power (Pmax)	45Wp	50Wp	55Wp
Open Circuit Voltage (Voc)	21.5 V	21.5 V	21.5 V
Maximum power point voltage (Vmpp)	17.1 V	17.1 V	17.1 V
Short circuit current (Isc)	2.94 A	3.28 A	3.60 A
Maximum power point current (Impp)	2.64 A	2.93 A	3.22 A
Tolerance	±10%	±10%	±10%
Cell Size (mm)	66 X 156	66 X 156	66 X 156
No. of cells	36	36	36
Dimensions (mm) ± 1	670 x 665 x 38	670 x 665 x 38	670 x 665 x 38
Maximum system voltage	600	600	600
Temperature co-efficient	NOCT (°C)45	NOCT (°C)45	NOCT (°C)45
$\frac{\partial V}{\partial T}$ (Voc) (mV/°C)	- 105	- 105	- 105
$\frac{\partial I}{\partial T}$ (Isc) (mA/°C)	- 0.32	- 0.32	- 0.32
$\frac{\partial P}{\partial T}$ (Pmax) (%/°C)	- 0.45	- 0.45	- 0.45
Weight (kgs)	5	5	5

Standard Test Condition : Irradiance 1,000 W/sq.m, Temperature 25deg C Air mass 1.5 spectrum)

Proven Materials and Construction

UPL experience shows in every aspect of this module's construction and materials

- ❖ Anodized aluminum frame offers required strength and allows for quick and easy installation on standard array structures.
- ❖ 36 Crystalline silicon solar cells in series.
- ❖ Modules are laminated in toughened low iron content PV grade glass – Ethyl Vinyl Acetate films – PV module back sheet.
- ❖ Optimized lamination process parameters ensure a stable laminate. Junction Box with PG Cable glands are standard in all modules.
- ❖ Each module is flash tested in a Sun simulator to ensure conformity to specification.

USL Photovoltaics Pvt Ltd

Coimbatore : 641 014. INDIA.

Phone : +91 422 2627851 Fax : +91 422 2628504
Email : info@uslvpv.com; Web site : www.uslvpv.com